

Crime and Disorder Select Committee – Scrutiny Review - Safety at Railway Crossing Points – Summary of Evidence

Theme	Evidence	Possible Recommendation Areas
<p>Scope of Review</p>	<p>Main issues</p> <ul style="list-style-type: none"> • The safety and general management of railway crossing points (both vehicular and pedestrian). • Concerns have been expressed about the safety of pedestrians, road users, and train staff and passengers. • In addition, railway crossing points and lines are sometimes the focus of anti-social behaviour <p>Key Lines of Enquiry</p> <ul style="list-style-type: none"> • Examine Network Rail policy. • The approaches taken by British Transport Police, the Council's Technical Services and Community Safety Services 	
<p>Background</p>	<p>Level crossings provide a means for vehicles, pedestrians and animals to cross over railway lines.</p> <p>Nationally there are around 7000 level crossings in active use on Network Rail managed infrastructure. Of these approximately 1500 are on public vehicular roads and the remainder are where public footpaths, bridleways and private roads/tracks cross the railway. Some private vehicular crossings have public footpath or bridleway rights.</p> <p>The layout, configuration and use of level crossings vary from location to location, so each one is essentially unique. To minimise the risk of trains striking crossing users the following features may also be present:</p> <ul style="list-style-type: none"> • barriers or gates at public vehicular crossings to physically prevent vehicle or pedestrian users from crossing the railway. These may be operated: <ul style="list-style-type: none"> - automatically upon detection of an approaching train, or - manually by railway staff present at the crossing (or from an adjacent signal box) or via remote control from the signal box controlling the area 	

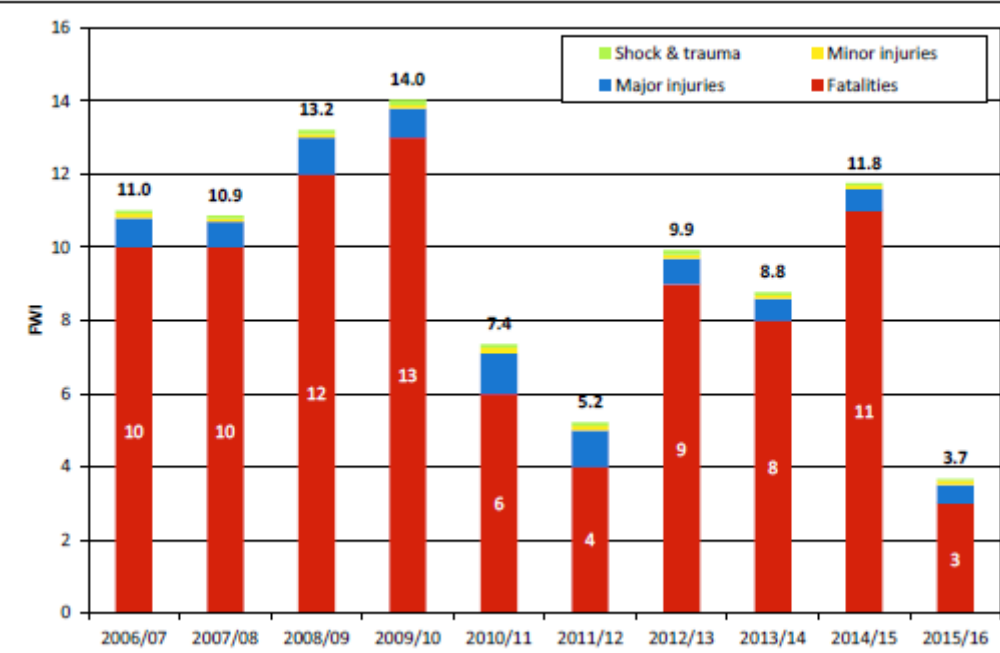
Theme	Evidence	Possible Recommendation Areas
	<ul style="list-style-type: none"> • Some barriers close off the entire road whereas others (i.e. half-barriers) simply close off the side of the road on which the road traffic approaches the crossing, leaving the exit from the crossing clear at all times • coloured lights which provide a visual indication to the user of whether, or not, it is safe to cross; this may also be combined with an audible alarm • telephones for the user to request permission from the signaller to cross • gates or stiles to highlight to the user where the boundary with the railway begins and ends. These can also prevent inadvertent trespass of children or animals onto the crossing or, in the case of locked gates, unauthorised use • signage to explain the safe method of using the crossing or to bring the user's attention to specific dangers • railway signals that can be set to stop trains on the approach to crossings which are open to crossing users before they are closed to allow trains to pass • railway signs that signify trains to stop on the approach to crossings which are crossed over when identified as safe to cross by the train crew <p>Exactly which of these crossing safety features need to be provided have for many years been specified by legislative requirements and industry standards, supplemented by HM Railway Inspectorate guidance.</p> <p>The principal factors which influence the requirements are maximum train speed, train frequency, crossing user frequency and whether it is for public or private use. Other risks that arise at level crossings include user slips/trips/falls (including cyclists), trespass along the railway line itself, equipment damage due to vandalism, electric shock from overhead wires and vehicle collisions with barriers, pedestrians or other vehicles.</p> <p>All highway crossings are controlled by a signaller although a number are controlled by CCTV and a remote signaller</p> <p>Network Rail plan to close all signal boxes and move to central operating centre.</p>	

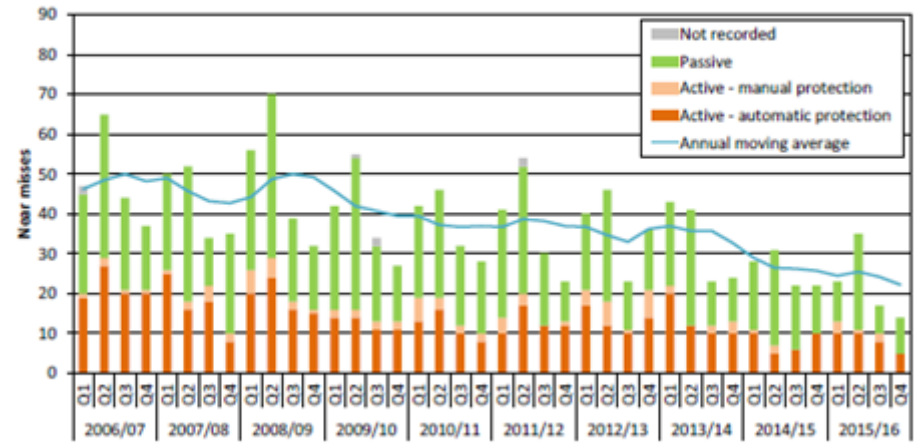
Theme	Evidence	Possible Recommendation Areas
Types of Level Crossings	<p>Types of level crossings in Great Britain include:</p> <ul style="list-style-type: none"> • Gated crossings operated by railway staff - this type of crossing is protected by gates, on both sides of the railway, which complete the fencing of the railway when closed across the road or the railway • Barrier crossings operated by railway staff - this type of crossing is protected by road traffic light signals and lifting barriers on both sides of the railway. An audible warning to pedestrians is also provided • Barrier crossings with obstacle detection - this type of crossing is protected by road traffic light signals and lifting barriers on each side of the railway. An audible warning to pedestrians is also provided • Automatic half barrier crossings (AHBC) - this type of crossing is protected by road traffic light signals and a lifting barrier on both sides of the railway. Audible warning to pedestrians is also provided • Automatic barrier crossings, locally monitored (ABCL) - this type of crossing appears, to the road user, to be similar to an automatic half barrier crossing. It is protected by road traffic light signals and a single lifting barrier on both sides of the railway • Automatic open crossings, locally monitored (AOCL) - this type of crossing has no barriers but is protected by road traffic light signals and an audible warning for pedestrians • Open crossings - this type of crossing does not have barriers or road traffic light signals. Only road traffic signs are provided. Road users must give way to trains at the crossing • User worked crossings (UWCs) for vehicles – this type of crossing is normally protected by gates, or lifting barriers on both sides of the railway. The gates, normally closed across the road and hung so as to open away from the railway, are operated by the users • Footpath and bridleway crossings - this type of crossing is found where the railway crosses a footpath or bridleway • Foot crossings at stations - this type of crossing is found between platforms at stations and may be the only route between platforms or the only practicable route for people who cannot use steps <p>Network Rail have advised that in Stockton, all 16 level crossings are at a satisfactory standard</p>	

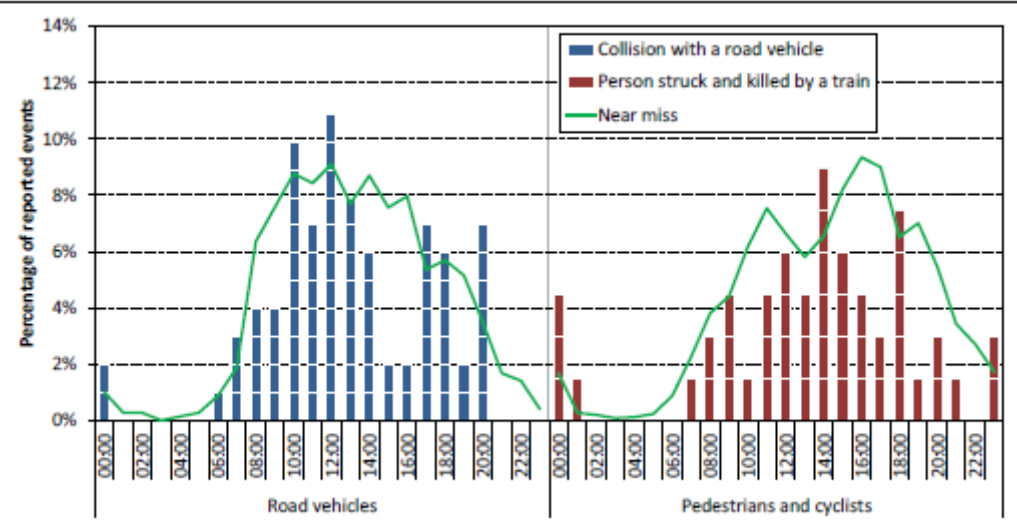
Theme	Evidence	Possible Recommendation Areas
	<p>All but one of the highway level crossings are scheduled to be upgraded to a manually controlled barrier crossing. This type of crossing would provide the highest protection being a full barrier operated crossing, protected by signals. No one could be trapped in this type of crossing and therefore it has the lowest risk.</p> <p>Automatic half barriers present a higher risk and red light enforcement cameras have been installed in other parts of the country. The cameras could trigger automatic penalty notices with offenders having to attend a level crossing improvement course or pay a fine. The upgrade planned to the Stockton highway level crossings would mean that no one could commit this type of offence.</p>	
<p>Level Crossing Risk</p>	<p>Network Rail's strapline is "the safest crossing is a closed crossing". Although it was not always possible to achieve this, crossings were upgraded where possible.</p> <p>Over 90% of risk in the previous five years has resulted from user misuse in the form of error or abuse - the remainder being due to other causes such as equipment failure, reduced visibility or railway operator error.</p> <p>Typical examples of user error include incorrect knowledge of operation, misjudging the time it takes the train to reach the crossing or making incorrect assumptions regarding who has priority of use, direction of travel or the presence of second train approaching usually from the opposite direction.</p> <p>Typical examples of user abuse include users driving around half-barriers, users crossing when the crossing lights are red, users not requesting the signaller's authority to cross (where required) and leaving gates open after use. Problems can occur when users were distracted, for example, headphones are a modern risk.</p> <p>On average, nationally, there are seven pedestrian and two to three vehicle occupant fatalities per year (excluding suicides). Accidents involving injury to persons on the train are rare.</p> <p>A number of changes are expected in the future that potentially could increase level crossing risk if longer term strategies and tactical initiatives are not put in place. These include:</p> <ul style="list-style-type: none"> • increased in population 	

Theme	Evidence	Possible Recommendation Areas
	<ul style="list-style-type: none"> • increasing pressures for new residential and commercial development – particularly in the already densely populated South East • the requirement to run additional train services and convey more passengers • increased number of elderly drivers • increased impatience brought about by the pace of modern life (i.e. users take greater risks to avoid having to wait for trains to pass). <p>Management of level crossings is based on risk and inspection frequency can range from 1 ¼ to 3 ¼ years. Level crossings are given a score for collective and individual risk. Collective risk is on a scale of 1 – 13 and individual risk is on a scale of A – M making A1 the highest risk score. No level crossings in Stockton have an A1 risk score.</p> <p>Asset inspections are carried out in partnership with highways officers as some parts of the level crossing are maintained by the highway authority.</p> <p>Information relating to risk factors including usage, type of user (i.e. children and vulnerable people) train numbers, line speed and type of crossing are all fed into an algorithm which generates a risk score and informs judgements on the need to make improvements.</p>	
<p>Reducing Level Crossing Risk</p>	<p>The most effective way of reducing level crossing risk is to eliminate the crossing completely. Whilst purely private level crossings can be closed by agreement with authorised users, closure of public level crossings is notoriously more difficult under the present law. In addition, closure of a public bridleway or footpath level crossing may result in a requirement to provide an alternative route either in the form of a bridge over the railway, an underpass beneath the railway or through provision of a diversionary route to a nearby existing bridge, underpass or level crossing.</p> <p>Provision of structures such as bridges or underpasses involves large capital investment. It can also take a long period of time before they are realised due to the need to obtain the necessary planning (and other) consents and the magnitude of the infrastructure works required. Additional land may also need to be purchased. To close a highway level crossing would cost in the region of £3 – 4 million.</p>	

Theme	Evidence	Possible Recommendation Areas
	<p>Network Rail is subject to the requirements of the Health and Safety at Work Act etc. 1974 to reduce risk 'so far as is reasonably practicable'. In simple terms this means that the cost, time and effort required in providing a specific risk reduction measure needs to be commensurate with the safety benefit that will be obtained as a result of its implementation. Network Rail's health and safety management system (part of its safety authorisation issued by the Office of Rail Regulation) sets out the company's approach towards prioritisation of safety expenditure.</p> <p>In the majority of cases the risk associated with individual level crossing use is insufficient to make a clear case for its closure and/or diversion. It is therefore necessary to understand any other benefits that can be factored in, for example reduced operational or maintenance costs, avoidance of forthcoming renewal costs, improved operating performance or funding obtained from other parties involved such as the Highways Agency, local councils or private housing developers. Management judgement also forms a key part of the decision process when qualitatively the risk warrants something to be done but the case for closure and/or diversion is not necessarily clear cut.</p> <p>If it is not practicable to close and/or divert the crossing then it may still be possible to reduce risk through the provision of improved safety features where it is considered reasonably practicable.</p> <p>In contrast provision of new level crossings would introduce additional risk and therefore would be permitted only in exceptional circumstances.</p>	

Theme	Evidence	Possible Recommendation Areas																																																																		
National Performance 2015/16	<p data-bbox="539 148 1021 180">Trend in Harm at Level Crossings:</p> <div data-bbox="551 220 1588 946"> <p data-bbox="562 236 1155 260">Chart 105. Harm at level crossings (excluding suicides)</p>  <table border="1" data-bbox="562 272 1559 927"> <thead> <tr> <th>Year</th> <th>Fatalities</th> <th>Major injuries</th> <th>Minor injuries</th> <th>Shock & trauma</th> <th>Total FWI</th> </tr> </thead> <tbody> <tr> <td>2006/07</td> <td>10</td> <td>1</td> <td>0</td> <td>0</td> <td>11.0</td> </tr> <tr> <td>2007/08</td> <td>10</td> <td>1</td> <td>0</td> <td>0</td> <td>10.9</td> </tr> <tr> <td>2008/09</td> <td>12</td> <td>1</td> <td>0</td> <td>0</td> <td>13.2</td> </tr> <tr> <td>2009/10</td> <td>13</td> <td>1</td> <td>0</td> <td>0</td> <td>14.0</td> </tr> <tr> <td>2010/11</td> <td>6</td> <td>1</td> <td>0</td> <td>0</td> <td>7.4</td> </tr> <tr> <td>2011/12</td> <td>4</td> <td>1</td> <td>0</td> <td>0</td> <td>5.2</td> </tr> <tr> <td>2012/13</td> <td>9</td> <td>1</td> <td>0</td> <td>0</td> <td>9.9</td> </tr> <tr> <td>2013/14</td> <td>8</td> <td>1</td> <td>0</td> <td>0</td> <td>8.8</td> </tr> <tr> <td>2014/15</td> <td>11</td> <td>1</td> <td>0</td> <td>0</td> <td>11.8</td> </tr> <tr> <td>2015/16</td> <td>3</td> <td>1</td> <td>0</td> <td>0</td> <td>3.7</td> </tr> </tbody> </table> </div>	Year	Fatalities	Major injuries	Minor injuries	Shock & trauma	Total FWI	2006/07	10	1	0	0	11.0	2007/08	10	1	0	0	10.9	2008/09	12	1	0	0	13.2	2009/10	13	1	0	0	14.0	2010/11	6	1	0	0	7.4	2011/12	4	1	0	0	5.2	2012/13	9	1	0	0	9.9	2013/14	8	1	0	0	8.8	2014/15	11	1	0	0	11.8	2015/16	3	1	0	0	3.7	
Year	Fatalities	Major injuries	Minor injuries	Shock & trauma	Total FWI																																																															
2006/07	10	1	0	0	11.0																																																															
2007/08	10	1	0	0	10.9																																																															
2008/09	12	1	0	0	13.2																																																															
2009/10	13	1	0	0	14.0																																																															
2010/11	6	1	0	0	7.4																																																															
2011/12	4	1	0	0	5.2																																																															
2012/13	9	1	0	0	9.9																																																															
2013/14	8	1	0	0	8.8																																																															
2014/15	11	1	0	0	11.8																																																															
2015/16	3	1	0	0	3.7																																																															

Theme	Evidence	Possible Recommendation Areas
	<p data-bbox="539 153 1227 180">Near misses with road vehicles by crossing type:</p> <div data-bbox="548 223 1512 730"> <p data-bbox="555 236 1164 263">Chart 110. Trend in reported near misses with road vehicles</p>  </div> <p data-bbox="539 783 1377 810">Near Misses with pedestrians and cyclists by crossing type:</p> <div data-bbox="548 853 1545 1396"> <p data-bbox="555 866 1288 893">Chart 112. Trend in reported near misses with pedestrians and cyclists</p>  </div>	

Theme	Evidence	Possible Recommendation Areas
	<p data-bbox="539 150 940 180">Near Misses by Time of Day:</p> <div data-bbox="551 225 1588 831"> <p data-bbox="562 240 1361 264">Chart 114. Accidents and near misses by time of day (2006/07 to 2015/16)</p>  <p data-bbox="562 810 808 831">Each block represents one event</p> </div> <p data-bbox="539 884 837 911">In 2015/16 there were:</p> <ul data-bbox="539 919 1608 1321" style="list-style-type: none"> • Three fatalities – all pedestrian • Five major injuries • 65 reported minor injuries • 28 reports of shock or trauma, mainly affecting train drivers • Four collisions between trains and road vehicles • The number of train collisions was at its lowest in 10 years • Collisions were the largest single cause of train accident risk • Train collisions with road vehicles contributed to 32% of the risk at level crossings – 29% affected members of the public in road vehicles and 3% affected people on trains • Slips, trips and falls accounted for 4% of risk and being struck by level crossing equipment accounted for 1% 	

Theme	Evidence	Possible Recommendation Areas
	<p>Factors affecting the risk at level crossings:</p> <ul style="list-style-type: none"> • Level Crossing Equipment Failure • Railway Crime • Actions by level crossing users <p>Initiatives by Network Rail to reduce the risk at level crossings:</p> <ul style="list-style-type: none"> • Introduction of level crossing managers • Improved risk assessments • Asset renewals • Risk based closure programme with £99m investment • Improvements to light signals • Half barrier overlay systems • Assessing the effectiveness of whistle boards • Installing audible warning systems • Delivering additional red light safety equipment • Mobile safety vehicles • Two new overlay miniature stop light systems • Power operated gate openers installed at 80 private vehicle crossings 	
<p>Network Rail – Strategy and key Initiatives</p>	<p>Network Rail’s overall strategy for managing level crossing risk is based upon a principle known as the four ‘E’s’:</p> <ul style="list-style-type: none"> • Education; educating crossing users on how to use level crossings correctly and highlighting the dangers of misuse • Enforcement; taking appropriate action to assist the police in identifying those who deliberately endanger others through their actions at level crossings with a view to securing their prosecution • Enablement; developing appropriate techniques, processes, models and relationships/partnerships to improve the management of level crossing risk (e.g. Road Rail Partnership Groups, the All Level Crossing Risk Model) • Engineering; requirement that level crossings are regularly inspected and correctly maintained. Additionally, where it is reasonably practicable to do so, enhancing crossing safety through means such as closure/diversion or provision of additional safety features/equipment (e.g. addition of telephones or lights, conversion from half-barriers to full-barriers) 	

Theme	Evidence	Possible Recommendation Areas
	<p>In addition to the established legislative requirements and risk management controls, Network Rail is taking forward the following key initiatives with a view to further improving level crossing safety:</p> <ul style="list-style-type: none"> • use of the All Level Crossing Risk Model (ALCRM) to gain a greater understanding of crossing risk and to target investment to close/divert or improve crossings where reasonably practicable • continuing to implement and evolve the 'Don't Run The Risk' public awareness campaign to educate users on how to use level crossings correctly and the dangers of misuse • investigation, trial and employment of measures to reduce the cost of level crossing closure such as 'modular'/standard bridge designs, new construction material /techniques/processes and challenging current construction standards • realising the benefits from the formation of Road Rail Partnership Groups through taking measures to address level crossing safety from both a highway and railway perspective • trialling of new technology which could reduce the cost of providing improved crossing safety features/equipment (e.g. conversion of automatic half-barrier crossings to automatic full-barrier crossings with obstacle detection) • realising the benefits from the recent establishment of a National Level Crossing Safety Group and creation of a national specialist team • realising the benefits from reducing the costs of level crossing design through bringing crossing renewal design in-house and reducing maintenance costs through the use of new technology to improve asset availability and reliability (e.g. replacement of filament bulbs with LEDs). 	
<p>National Campaigns</p>	<p>Network Rails programme of national safety awareness activity includes working with local communities to find safer ways to cross the railway – above, beneath or via an alternative route.</p> <p>Dedicated community safety and level crossing teams work to reduce railway crime and increase safety awareness.</p> <p>Safety awareness and media campaigns have been run together with partner organisations to reach particular at-risk groups.</p>	

Theme	Evidence	Possible Recommendation Areas
	<p>Network Rail advised that although national awareness campaigns were run, TV advertising was very expensive and it was hard to judge the impact of these. As a result awareness campaigns tended to have a local focus. In addition, as Network Rail were now part of the Government and there were more constraints on funding for campaigns.</p> <p>In addition Network Rail are working with the Police and Crown Prosecution Service to change driver behaviour through prosecution of offenders who deliberately misuse level crossings and targeted safety courses.</p>	
Local Resourcing	<p>The Transport Police advised that their staffing had not been reduced locally and that there were 10 PCs working from 7am to midnight each day across the Tees Valley. Out of hours cover was provided from Newcastle.</p>	
Local Issues and Communication	<p>Committee Members commented that they were aware of incidents of motorists driving through half barriers. Network Rail and British Transport Police reported that there had been no recorded reports of misuse of this type in Stockton and that reports would usually come from train drivers as the barriers at this type of crossing would only come down just before the train crossed the road.</p> <p>Transport Police representatives commented that they were not aware of any reports of pedestrians being run down on the line. There had been one fatality in the last four years which was a suicide and reports of trespass were minimal.</p> <p>With regard to suicide, Network Rail worked closely with the Samaritans but the figures from suicide were disregarded for reporting purposes.</p> <p>Members were also aware of youths being pulled away from railway lines by residents and a case of a pedestrian being “clipped” by a train. Transport Police confirmed that they had received no reports and stressed the need for the public to report such incidents and the importance of getting this message out to the general public. They stressed that if children were sighted on a railway line, a 999 call should be made. The more intelligence received on misuse would strengthen the case for an upgrade. The Transport Police also carried out school liaison in areas where there was known to be problem.</p> <p>Network Rail also ran education programmes in high risk areas and Community Safety also ran initiatives such as Crucial Crew working with school children.</p>	<p>Develop a communication strategy utilising social media, publicising contact details etc.</p> <p>Role for Council to raise awareness in schools and as part of initiatives such as Crucial Crew and junior road safety officer to complement the work of the BTP.</p>

Theme	Evidence	Possible Recommendation Areas
	<p>Better intelligence and reporting of issues and incidents would enable Network Rail to build a better risk profile and better inform the need to upgrade any crossings. The Chair commented that Members could be encouraged to put contact numbers in ward newsletters and the Council could play a role in raising awareness.</p>	
<p>Partnership Working between Network Rail and British Transport Police</p>	<p>Both Network Rail and Transport Police representatives attending the Select Committee meeting agreed that they were working together effectively. For example, they had a shared resource in a red light enforcement vehicle which issued auto prosecutions; they had worked on joint awareness campaigns such as Operation Look; attended schools together and shared data each month.</p> <p>Network Rail felt that the Highway Authority should classify roads for maintenance purposes giving a higher priority to those roads with a level crossing. For example, vegetation by the level crossing at Cowpen Lane caused obstruction; a higher priority would mean more regular maintenance and reduce risk</p>	
<p>Best Practice</p>	<p>Network Rail commented that in other parts of the country a Road Rail Partnership had proven to be an effective way to share intelligence with membership drawn from Network Rail, Highway officers, Planning officers and Public Rights of Way Officers to discuss general concerns and provide an interface between Network Rail and Highways. Given the low number of railway crossings in Stockton, a partnership of this type could be in conjunction with other local authorities</p> <p>The Council would welcome an enhanced relationship and in respect of schools liaison, the Council's road safety officer could have a role attending schools where the lower risk meant that police engagement would not take place. The Council's Communications Department could also help to get messages out through social media.</p>	<p>Establish a road rail liaison group to:</p> <ul style="list-style-type: none"> - discuss general concerns - share intelligence - provide an interface between all agencies - discuss road classifications - share timescales for programmes of work